Collar
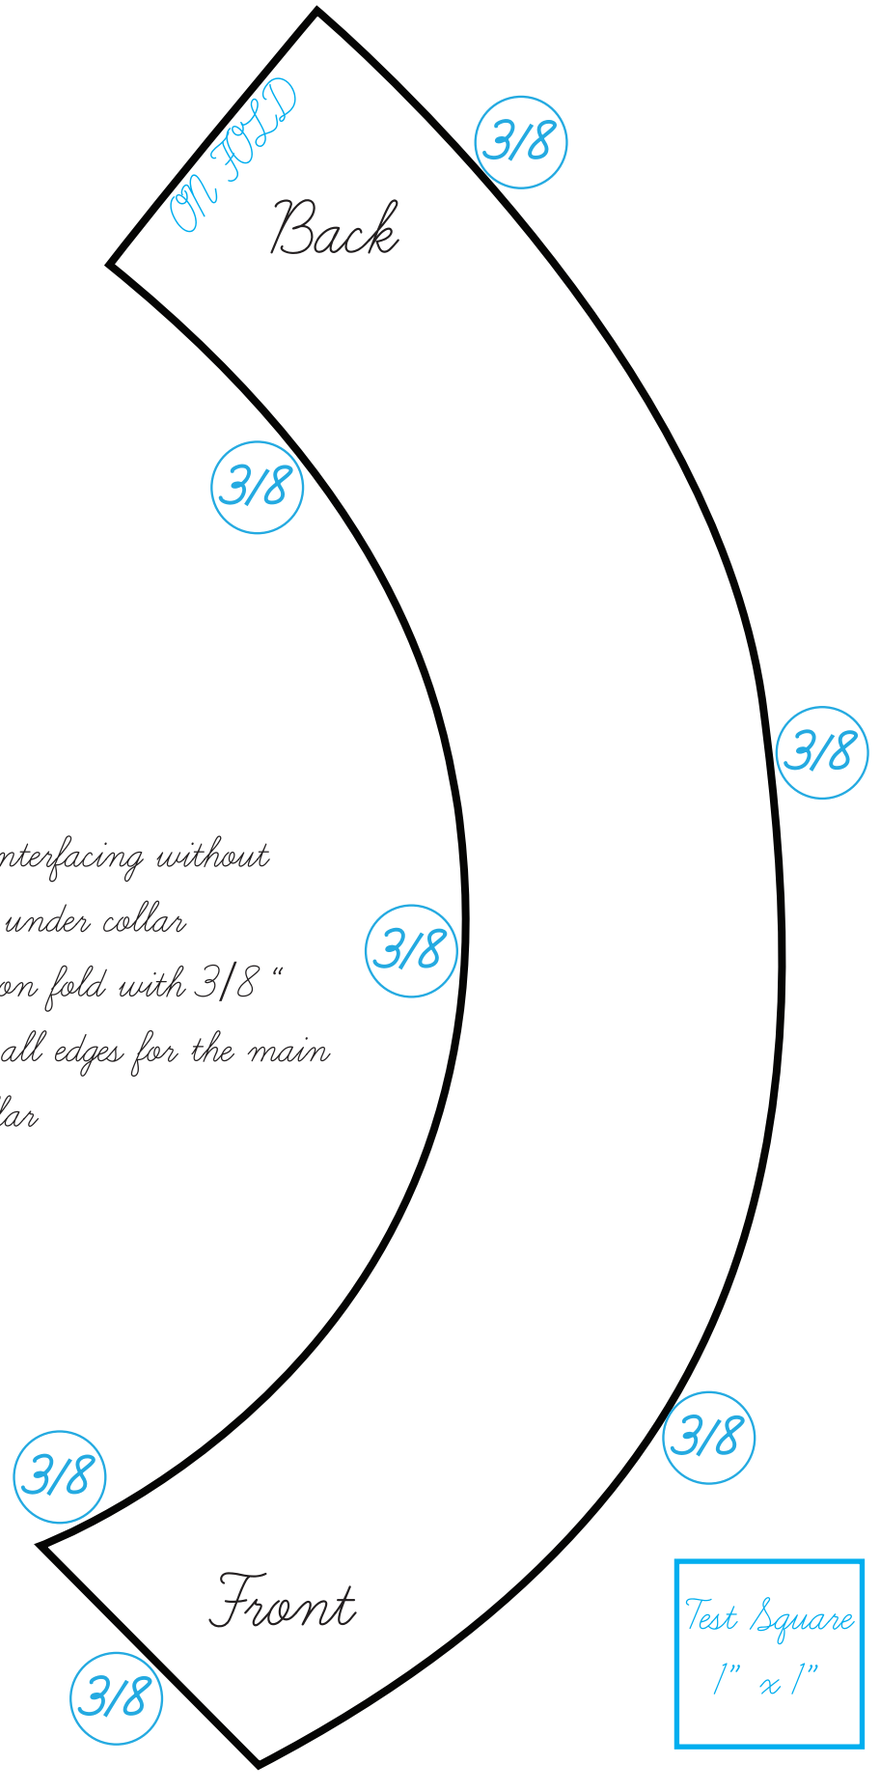
* Cut 1 piece of fusible interfacing without seam allowances for the under collar
* Cut 2 pieces of fabric on fold with 3/8 " seam allowance around all edges for the main collar and the under collar